

AZC-HD81100C

AHD Starlight Full HD 1080PWDR Speed Dome

- AHD 1920 (H) x 1080 (V) Zoom Camera
- 1/2.8" Sony 2.1M STARVIS CMOS Sensor
- Color: 0.02Lux@F1.6, B/W: 0.005Lux@ F1.6
- Optical 10X Zoom: f5-50mm / F1.6
- Push AF & Auto IRIS Zoom Lens
- BNC Video Output: AHD
- OSD Menu Control & UTC Control
- Powerful WDR & Anti-Headlight (HLC)
- Fog Reduction & 3D/2D Noise Reduction




Video	Video System	PAL / NTSC Selectable
	Image Sensor	1/2.8" Sony2.1M STARVIS CMOS Sensor
	Resolution	1920(H) x 1080(V)
	Frame Rates	1920 x 1080P@25/30fps
	Minimum Illumination	Color: 0.02Lux@F1.6, B/W: 0.005Lux@ F1.6
	Wide Dynamic Range	120dB
	FHD Video Output	AHD 1080p
	Analog Video Output	N/A
	Audio	N/A
	Mechanical IR Cut Filter	Automatically Switches (Switching Lux Level can be adjusted)
Function	OSD Menu	CoC Control (UTC) ; RS485 Control
	Day & Night Mode	Color / B&W / Auto
	IRIS; Electronic Shutter	Auto Iris; Auto:1/25(30)~1/30, 000 Sec; Manual: 1/25(30), 1/50(60), 1/100(120),1/200(240), 1/500,1/1000,1/2000,1/4000, 1/8000, 1/16000, 1/30000 Sec
	Auto Gain Control	Auto (0~20 Steps)
	White Balance	ATW / AWB / PWB(Push Lock) / Manual
	WDR; BLC; HLC	High (Max 120dB) / Middle / Low / Off; Program; On/Off
	Flickerless	PAL 50Hz / NTSC 60Hz / Off
	Fog Reduction	Auto / Manual / Off; Level: High / Middle / Low
	Dynamic Noise Reduction	Smart DNR / 3D & 2D (High / Middle / Low / Off)
	Sense Up	On (x2, x4, x8, x16, x32) / Off
Control	Digital Image Stabilizer	N/A
	Language	English, Japanese, Traditional Chinese, Simplified Chinese
	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Mask	16 Zones Programmable
	Motion Detection	On: Sensitivity, Programmable /Off
	Auto Trace	8 Groups (accommodates preset #1~#16)
	Home Function	Yes
	System Memory	Yes
	Panning Rang & Speed	360° Continuous; 40° / sec.
	Tilt Rang & Speed	0°~90° (Mechanical Rotate); 20° / sec.
General	Preset Positions	128Positions
	Alarm Input / Output	N/A
	Focusing System	Manual / Push AF
	Camera Control Interface	CoC / Pelco C; RS485 / Pelco D
	Lens	10X Optical Zoom, f5mm (Wide)~50mm(Tele), F1.6
	Angle of View	Pan: 54°(Wide)~4.9°(Tele); Tilt: 31°(Wide)~4°(Tele)
	Minimum Working Distance	0.1m(Wide)~1m(Tele)
	Water Resistance	N/A
	Power Supply; Consumption	12Vdc; 8.4W(Max)
	Operation; Storage Temp.	-10°C ~ 50°C;-20°C ~ 60°C
Operation; Storage Humidity	Maximum: RH80%; RH90%	
Dimensions	140 x 135mm	
Net Weight	950g	



Dimensions

Tol:±0.5Unit:mm

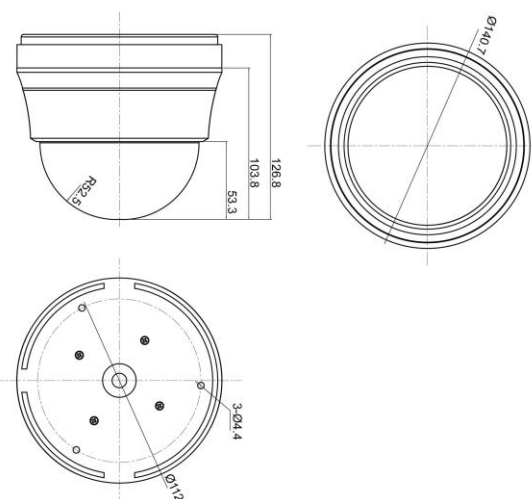

Option



MTB-413
Wall-Mount
(Outdoor)

*Specifications are subject to change without notice. 1082_v01_181212